

INSTALLATION INSTRUCTIONS

Emergency Bulkhead Maintained / Non - Maintained
 Product Codes: **LFACLED-2**

Safety Warning



- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.




Specification

Box Contents -

1 x Emergency Bulkhead Maintained / Non-Maintained
 1 x Self Adhesive Legend Kit
 1 x 3.6V Ni-Cd Battery

Dimensions:	L: 350 x W: 110 x D: 65mm
Material:	Polycarbonate
Colour Temperature:	6500K
CRI:	Ra>80
LED Lifetime:	L70B50 35,000 Hrs
IP Rating:	IP65
IK Rating:	IK06
Working Temperature:	5°C to 25°C
Guarantee:	3 Years (Batteries: 1 Year)

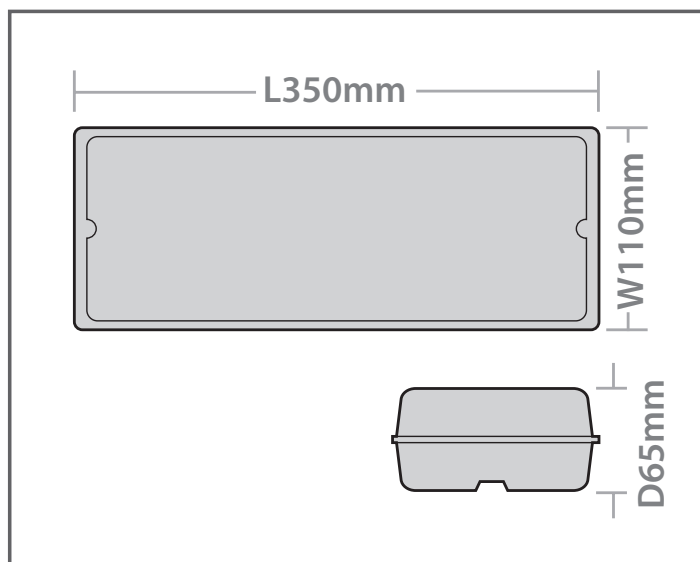

*Batteries 1 year guarantee

MAXIMUM FITTINGS PER CIRCUIT

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
LFACLED-2:	28	50	76	100	116	66	100	132	166

Recommended Spacing

LFACLED-2 Open Area				
Mount Height (m)	Open Area 0.5 Lux min (m)			
Self Contained				
2.5	3.1	7.4	3.7	9.3
2.8	3.4	7.9	3.8	9.7
3.0	3.5	8.2	3.9	9.9
4.0	4.0	9.7	3.7	10.8
5.0	4.1	10.9	3.6	10.7

LFACLED-2 Escape Route		
Mount Height (m)	Escape Route 1 Lux min (m)	
Self Contained		
2.5	2.7	6.3
2.8	2.8	6.8
3.0	2.9	7.1
4.0	2.8	8.1

Installation Instructions


1. Remove the led emergency bulkhead from the box, remove the diffuser using the screws at either side and then remove the gear tray from the base.
2. Fix the base to the ceiling or wall in the location that you have chosen. To maintain the ip65 integrity please use a suitable gland for the cable entry point.
3. On the gear tray there is a link between the Ls and the I terminals, you can decide at this point if you want the fitting to be switched or on all the time. If you require the ability to switch, then please remove the link and wire in as below.
4. Replace the gear tray in the body and wire as per the regulations. (I=permanent live, Ls=switched live, n=neutral, e=earth).
5. Plug in the cable from the battery supplied to the PCB.
6. Clip the gear tray back into place and replace the diffuser, making sure that the screws are fully tightened to ensure a good seal.
7. Turn the power back on and test to see if everything is working correctly.
8. Please leave the power connected for 24-36 hours to fully charge the battery, before any emergency test is completed.

Guarantee

This product is guaranteed for a period of 3 years from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The guarantee is also invalidated if the luminaire has been insulation tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

Maintenance

- This fitting will require routine cleaning if used in adverse (dust, paint, welding, oils etc) environments. Do not use solvents, aggressive detergents or abrasives.
- The light source & driver in this luminaire can be quickly and easily replaced at end of life. This should be carried out by a competent person. Contact Red Arrow for details of replacements.

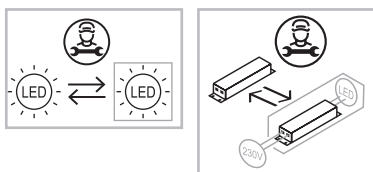

- When this fitting comes to the end of its life or you choose to replace it, please do not dispose of it with your normal waste. Please recycle where the facilities exist, check with your local authority for suitable options.

INS_EMERGENCY_0004_LFACLED-2_V4

INSTALLATION INSTRUCTIONS

Emergency Testing Sheet

Testing (Emergency Versions)

The emergency light must be tested and inspected regularly in accordance with local codes of practice.

NOTE: For safety reasons tests should be carried out preceeding time of low risk, to allow for battery recharge.

The minimum recommended test schedule is as follows:

Commissioning - After installation, allow 36 hours to ensure full battery charge, and then interrupt the supply; check after 3 hours that the lamp is still illuminated.

1. Daily - Check that the charge indicator LED is working.
2. Monthly - Interrupt the power supply for a period sufficient to ensure each lamp is illuminated. At the end of the test, restore the supply and check the indicator is illuminated.
3. Annually - Interrupt the supply as in 2, but for the full rated duration. Ensure the lamp is illuminated at the end of the rated duration. Restore the supply and check the indicator is illuminated.
4. Record the date and result of each test, attending to any maintenance required in the event of a test failure.

Luminaire Location

Date Installed

Date Commissioned

Month	Test	Year 1			Year 2			Year 3		
		Signed	Result / Action	Date	Signed	Result / Action	Date	Signed	Result / Action	Date
1	Functional									
2	Functional									
3	Functional									
4	Functional									
5	Functional									
6	Functional									
7	Functional									
8	Functional									
9	Functional									
10	Functional									
11	Functional									
12	Full Duration									