
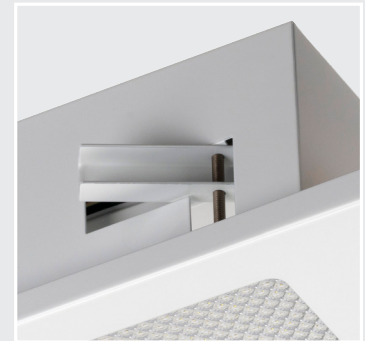


502F

RECESSED EMERGENCY

Perfect for applications where inobtrusive emergency lighting is required, the 502F recessed fitting features fully adjustable ceiling brackets. Suitable for retrofit applications.

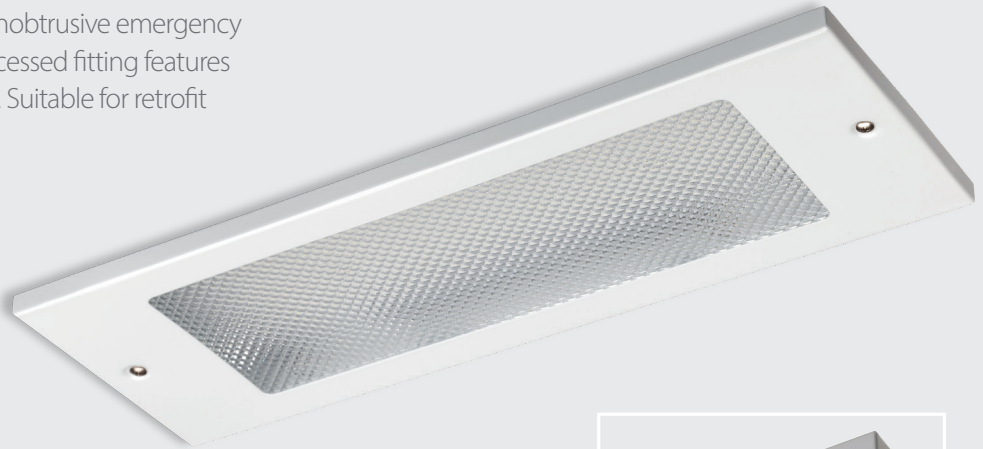

ADJUSTABLE CEILING
BRACKETS



Features

- Recessed mounting with fully adjustable brackets, fixed from below
- Ideal for retrofit applications
- Attractive prismatic diffuser
- Maintained or non-maintained operation

Specification

Material:	Body: Steel Diffuser: Polycarbonate
Colour Temperature:	6000K
Colour Finish:	White
CRI	Ra>70
LED Lifetime:	L70B50 30,000 Hrs
IP Rating:	IP20
IK Rating:	IK10
Working Temperature:	0°C to 40°C
Power Factor:	0.43
Emergency Battery Type:	Ni-Cd
Electrical Class:	Class: I
Guarantee:	1 Year

Dimensions

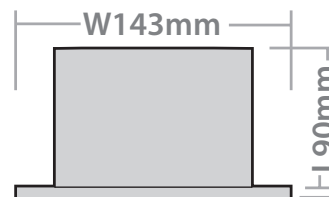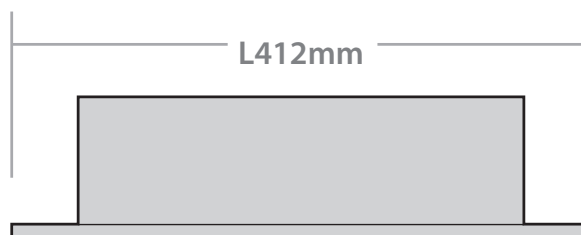

Cut out: 340 x 120mm

Product Code	Description	Wattage	Maintained Lumen Output	Emergency Lumen Output	Net Weight (kg)	Barcode
LFACLED502F	Fully Recessed Emergency Fitting	2.5W	297 lm	201 lm	1.59	5055807617482

Spacing Tables

LFACLED502F Open Area					
Mount Height (m)	Open Area 0.5 Lux min (m)				
Self Contained					
2.5	3.6	8.8	3.5	8.3	
2.8	3.8	9.2	3.6	8.7	
3.0	3.9	9.5	3.7	9.0	
4.0	4.3	10.8	4.2	10.2	
5.0	4.6	11.7	4.5	11.2	

LFACLED502F Escape Route		
Mount Height (m)	Escape Route 1 Lux min (m)	
Self Contained		
2.5	2.9	7.2
2.8	3.0	7.5
3.0	3.1	7.8
4.0	3.3	8.6



www.redarrowelectrical.co.uk

