

INSTALLATION INSTRUCTIONS

Globe Light 360° Workspace Lighting.

Product Codes: GLS30YPW, GLE30YPW, GLTYPW

Safety Warning



- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk.
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.





Specification

Box Contents -

1 x Globe Light
1 x H05VV-F 5m Cable
1 x PG11 Cable Glands

Dimensions:	L: 252 Ø: 190mm
Material:	ABS + Polycarbonate
Colour Temperature:	6500K
CRI:	Ra>80
LED Lifetime:	L70B50 35,000Hrs
IP Rating:	IP44
IK Rating:	IK07
Working Temperature:	Standard: -20°C to 40°C (Emergency version 0°C to 40°C)
Power Factor:	>0.9
Guarantee:	2 Years

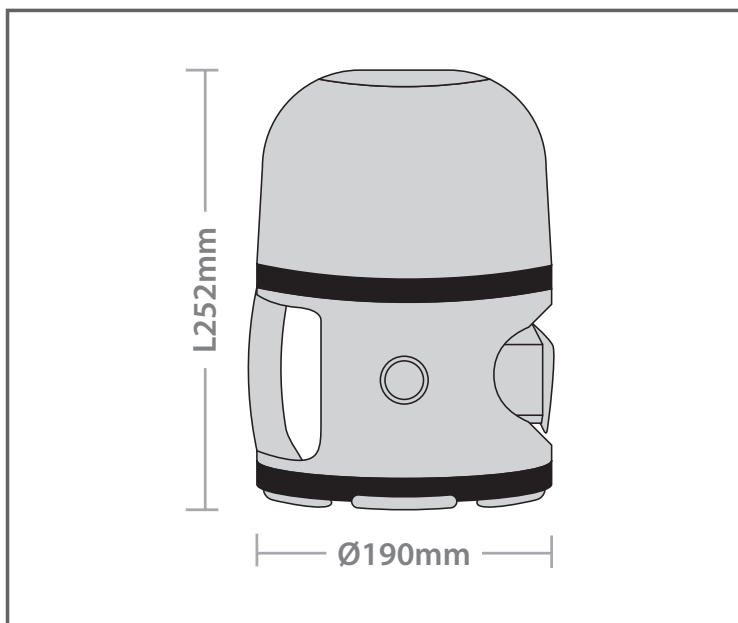

Installation Instructions


- The 30W LED globe light is for use with 110V supply only.
- Remove the globe light from the box.
- The light has three mounting options (stand-alone, tripod and hanging hook). If required, the tripod can be purchased separately, part no. GLTYPW.
- Attach the 110V plug to a suitable power source and test to see if the light is working.
- If the emergency option has been purchased, then the switch on the side must be in the 'on' position. To charge the battery, the globe light must be left connected and powered on. This will then begin to charge. The longer it is left connected, the longer the emergency light will operate when emergency mode is engaged. (e.g. 24 hours charge will give 3 hours run time).
- If you remove power from the 30W LED globe light and do not wish to have it running in emergency, turn the switch into the 'off' position. Please remember to put the switch back to the 'on' position before using again in normal operation.
- The 30W LED globe light includes an auxiliary socket. This can be used to attach an additional globe light. Up to a maximum of 20 fittings can be connected together this way.

Guarantee

This product is guaranteed for a period of 2 years from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The guarantee is also invalidated if the luminaire has been insulation tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

Maintenance

- This fitting will require routine cleaning if used in adverse (dust, paint, welding, oils etc) environments. Do not use solvents, aggressive detergents or abrasives.
- The light source & driver in this luminaire are non-replaceable.



- When this fitting comes to the end of its life or you choose to replace it, please do not dispose of it with your normal waste. Please recycle where the facilities exist, check with your local authority for suitable options.

INS/SITE/0024/GLS_GLE/V2