

EMERGENCY DOWNLIGHT

RECESSED NON-MAINTAINED

This non-maintained emergency downlight offers a neat and cost effective alternative to converting mains luminaires. It is easy to install with plug-in connectors.




Features

- Discreet emergency lighting solution
- Value for money alternative to converted luminaires
- Suitable for any recessed application - module and battery fits through cut-out

Specification

Material:	Aluminium
Colour Temperature:	6000K
Colour Finish:	White
CRI	Ra>70
LED Lifetime:	L70B50 35,000 Hrs
IP Rating:	IP20
Working Temperature:	0°C to 40°C
Power Factor:	0.17
Emergency battery Type:	Ni-Cd
Electrical Class:	Class: I
Guarantee:	2 Years (Batteries: 1 Year)

Dimensions

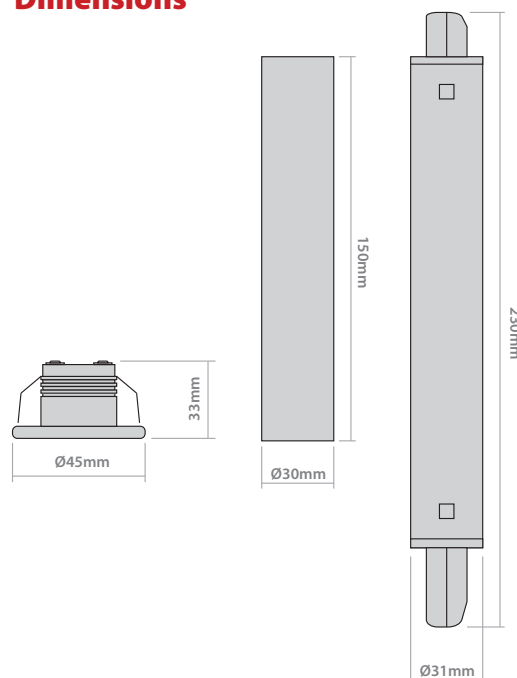

Product Code	Description	Wattage	Emergency Lumen Output	Net Weight (kg)	Barcode
LFLEDW1.5NM	Non-Maintained Circular Downlight	1.5W	117 lm	0.34	5055807620680

Spacing Tables

LFLEDW1.5NM Open Area					
Mount Height (m)	Open Area 0.5 Lux min (m)				
Self Contained					
2.5	3.8	9.7	3.8	9.7	
2.8	3.9	10.3	3.9	10.3	
3.0	4.0	10.5	4.0	10.5	
4.0	4.1	11.1	4.1	11.1	
5.0	4.0	11.7	4.0	11.7	

LFLEDW1.5NM Escape Route		
Mount Height (m)	Escape Route 1 Lux min (m)	
Self Contained		
2.5	2.9	7.7
2.8	2.9	7.8
3.0	2.9	8.0
4.0	2.7	8.3



www.redarrowelectrical.co.uk

