


RHOMBUS

BACK-LIT TP(b) PANEL



Rhombus back-lit panels now offer even greater value for money. These cost saving conscious panels are supplied with Philips drivers and are fitted with TP(b) diffusers as standard.

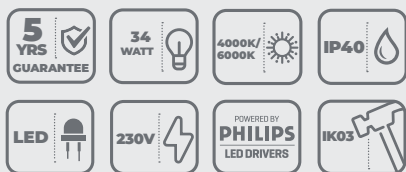


Features

- High efficacy 115 lm/W
- TP(b) diffuser
- Philips brand driver
- Emergency conversion option
- Ideal for projects where cost is a primary consideration

Specification



Material:	Body: Steel Frame: Aluminium Diffuser: TP(b) PS
Colour Temperature:	4000K / 6000K
Colour Finish:	White RAL9003
CRI	Ra>80
LED Lifetime:	L80B50 30,000 Hrs
IP Rating:	IP40
IK Rating:	IK03
Working Temperature:	-20°C to 45°C
Power Factor:	>0.9
Electrical Class:	Class II
Guarantee:	5 Years

Dimensions

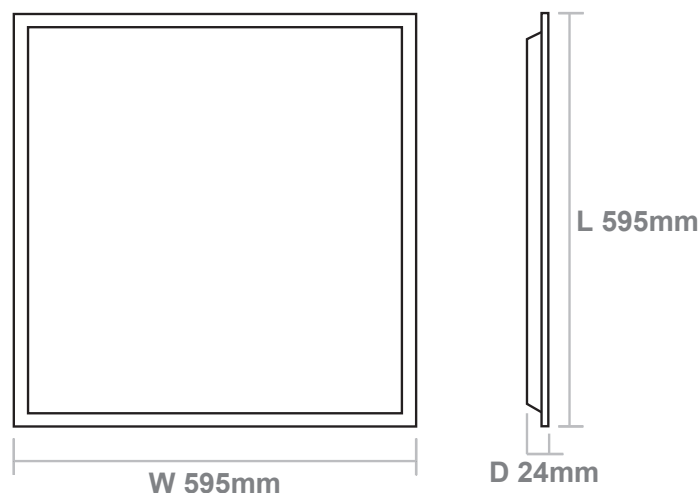

Product Code	Description	Wattage	Lumen Output	Colour Temperature	Efficacy	Barcodes	Net Weight (kg)
RBE6634-40	Rhombus Back-lit TP(b) Panel	34W	3910 lm	4000K	115 lm/W	5055807622950	1.65
RBE6634-60	Rhombus Back-lit TP(b) Panel	34W	3910 lm	6000K	115 lm/W	5055807622967	1.65


Product Code	Description	Emergency Battery Type	Emergency
TITAN/KIT	Emergency Conversion Kit	LiFeP04	5055807623537
EMLEDKIT3	Emergency Conversion Kit	Ni-Cd	5055807619554

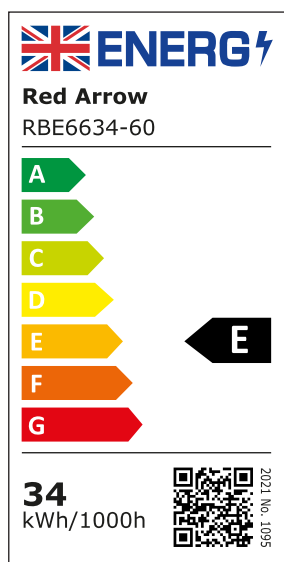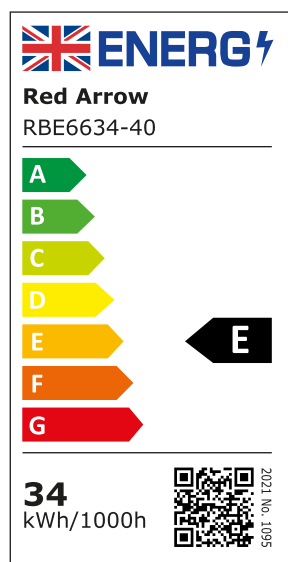

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
RBE6634-40/RBE6634-60	9	16	21	25	32	16	21	25	32

Light Distribution Curve

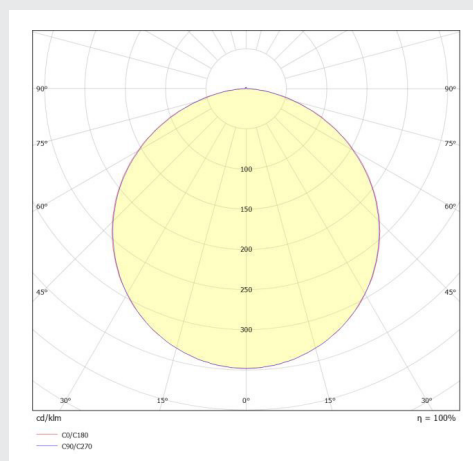

www.redarrowelectrical.co.uk