

## Safety Warning




- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.



## Specification

**Box Contents -**  
 1 x Wilson X Evolution Slim Bulkhead

<b>Dimensions:</b>	Ø: 435 x D: 100mm
<b>Material:</b>	Steel body & polycarbonate diffuser
<b>Working Temperature:</b>	Standard: -20°C - 40°C
<b>Included:</b>	Grommet and Fixings

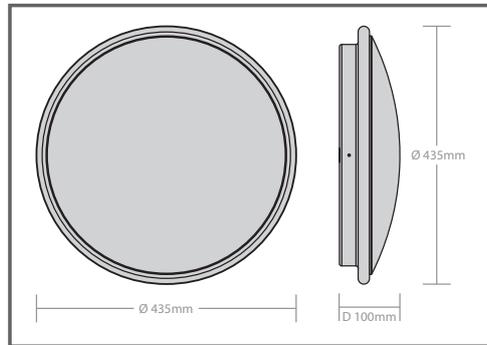

## MAXIMUM FITTINGS PER CIRCUIT

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
<b>Rated Current:</b>	6A	10A	13A	16A	20A	10A	13A	16A	20A
<b>Cable (mm):</b>	1.5	1.5	1.5	2.5	2.5	1.5	1.5	2.5	2.5
<b>WLX30EVO-CCT-V2</b>	18	30	40	49	60	46	60	73	92

## Installation Instructions

- Isolate the mains supply before commencing with the installation.
- Remove the diffuser from the base. Press the diffuser in, against the spring clips. Slide the diffuser to one side until one edge is visible. Pull visible edge out of the body to remove diffuser.
- Loosen, but do not remove, the 4 gear tray retaining screws, rotate the gear tray to align the screw heads with the large aperture of the keyhole slots and remove the gear tray away from the base.

