

UFO-X

DIMMABLE HIGH BAYS



UFO-X high bays deliver outstanding value for money, thanks to their high efficiency and impressive specification. The IK10, IP65 design makes the UFO-X suitable for any tough environment.


Features

- Energy saving, high efficiency - 130 lm/W
- Wide range of outputs in both 4000K & 6500K
- 1-10V dimmable driver as standard
- 4kV surge protection for peace of mind
- Optional microwave sensor available

Specification

Material:	Body: Aluminium Diffuser: Tempered Glass
Colour Temperature:	4000K & 6500K
Colour Finish:	Black
CRI:	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65
IK Rating:	IK10
Working Temperature:	-30°C to 45°C
Power Factor:	>0.95
Electrical Class:	Class I
Guarantee:	5 Years

Dimensions

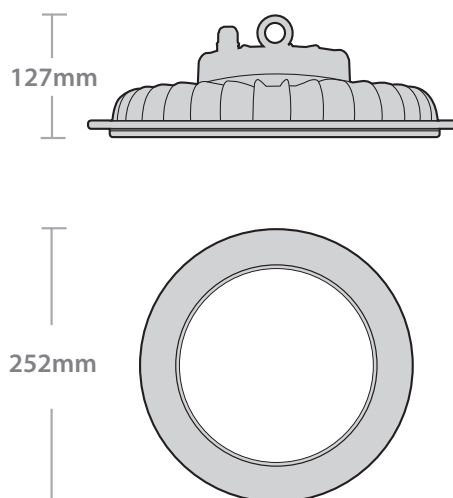

Product Code	Description	Wattage	Lumen Output	Colour Temperature	Efficacy	Net Weight (kg)	Barcodes
UFOX100-40	UFO-X LED Dimmable High Bay	100W	13,000 lm	4000K	130 lm/W	2	5055807622660
UFOX100-65	UFO-X LED Dimmable High Bay	100W	13,000 lm	6500K	130 lm/W	2	5055807622691
UFOX150-40	UFO-X LED Dimmable High Bay	150W	19,500 lm	4000K	130 lm/W	2	5055807622677
UFOX150-65	UFO-X LED Dimmable High Bay	150W	19,500 lm	6500K	130 lm/W	2	5055807622707
UFOX200-40	UFO-X LED Dimmable High Bay	200W	26,000 lm	4000K	130 lm/W	2	5055807622684
UFOX200-65	UFO-X LED Dimmable High Bay	200W	26,000 lm	6500K	130 lm/W	2	5055807622714




Product Code	Description
HLBMS	Microwave Sensor
HLBMS-RC	Remote Control for Microwave Sensor
COMHBMSB-2	Bracket for HLBMS



Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	1.5	2.5	1.5	1.5	1.5	2.5
UFOX100-40	3	5	7	8	11	9	11	14	18
UFOX100-65	3	5	7	8	11	9	11	14	18
UFOX150-40	3	5	7	8	11	9	11	14	18
UFOX150-65	3	5	7	8	11	9	11	14	18
UFOX200-40	1	3	5	6	7	6	8	10	13
UFOX200-65	1	3	5	6	7	6	8	10	13

Light Distribution Curve

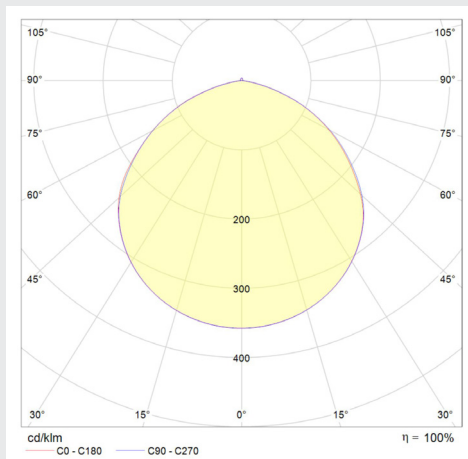

www.redarrowelectrical.co.uk