

### Safety Warning



- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.




### Specification

#### Box Contents -

1 x Rhombus Surface Mounting Kit

<b>Dimensions:</b>	RSK66: L: 600 x W: 600 x D: 70mm RSK126: L: 1200 x W: 600 x D: 70mm RSK123: L: 1200 x W: 300 x D: 70mm
<b>Material:</b>	Aluminium
<b>Included:</b>	2 x End Plates, 2 x Side Bars, 8 x Screws

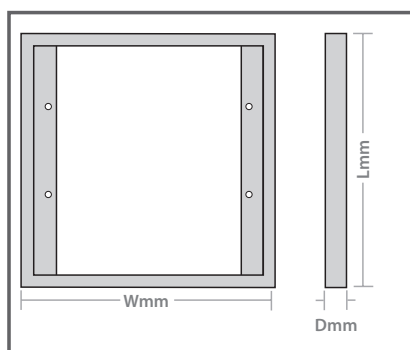

### Installation Instructions

1. Remove the 4 metal bars and the screws from the box.
2. Screw together the two side bars and one of the end plates with the screws provided.
3. Locate the kit in the desired position on the ceiling and screw into place using suitable fixings (not supplied).
4. Slide your Rhombus LED Panel into the Surface Mounting Kit from the end that is open, placing the LED Driver on the back of the Panel, after connecting it to the power supply.
5. Once the Panel is fully inserted, attach the second end plate to the kit with the remaining screws.

### Guarantee

This product is guaranteed for a period of 1 year from the date of purchase. The guarantee is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The guarantee is also invalidated if the luminaire has been insulation tested. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

### Maintenance

- This fitting will require routine cleaning if used in adverse (dust, paint, welding, oils etc) environments. Do not use solvents, aggressive detergents or abrasives.
- When this fitting comes to the end of it's life or you choose to replace it, please do not dispose of it with your normal waste. Please recycle where the facilities exist, check with your local authority for suitable options.

INS/COMMERCIAL/0021/RSK/V1