

PLASTERER'S A-FRAME

PORTABLE SITE LIGHTING



















Our Plasterer's A-Frame is a handy addition to the Weatherguard Site range. This portable fitting is easy to relocate and features a useful cable storage facility.

Features

• Lightweight and easy to relocate on site


- Strong, stable frame
- Includes 2x110V power outlets for connecting more fittings or power tools
- Supplied with 5m cable and pre-wired plug



Specification


Material:	Body & Diffuser: Polycarbonate Frame: Steel	
Colour Temperature:	4000K	
Colour Finish:	Yellow	
CRI:	Ra>80	
LED Lifetime:	L80B50 30,000 Hrs	
IP Rating:	IP65	
IK Rating:	IK07	
Working Temperature:	-20°C to 40°C (Emergency version 0°C to 40°C)	
Power Factor:	0.9	
Emergency Battery Type:	LiFePO4	
Electrical Class:	Class I	
Guarantee:	3 Years	

Dimensions



SITE LIGHTING SPECIFICATION SHEET

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Barcodes	Weight (kg)
WGS220Y/AF	Weatherguard Site A-Frame	20W	2000 lm	-	100 lm/W	5055807622769	3.0
WGS220Y-E/AF	Weatherguard Site A-Frame c/w 3Hr EM	20W	2000 lm	180 lm	100 lm/W	5055807622776	3.3

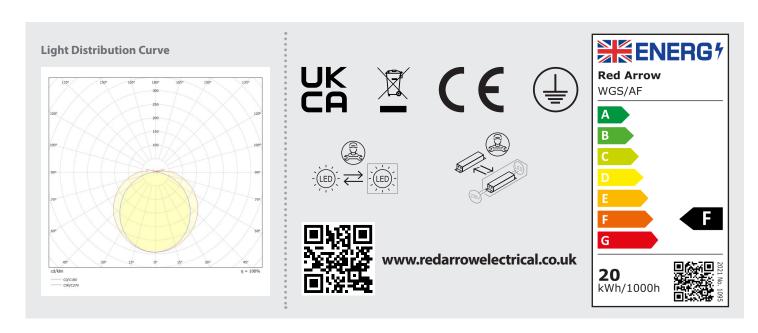

Red Arrow Electrical Ltd, Cortonwood Drive, Brampton, Barnsley S73 0UF

SPEC_SITE_0010_WGS220Y_AF_V3