



DBR

DIE-CAST IP65 BULKHEAD



The timeless classic design of DBR bulkheads make them suitable for virtually any general outdoor area lighting application. Available as a full diffuser or stylish eyelid version, both can be specified with integral emergency and photocell as options.


Features

- Attractive, classic design with full or eyelid diffuser
- IP65 & IK10 rated for robust outdoor applications
- Integral emergency options available
- Photocell options for dusk to dawn operation

Specification

Material:	Body: Die-Cast Aluminium Diffuser: Polycarbonate
Colour Temperature:	4000K
Colour Finish:	Black
CRI	Ra>80
LED Lifetime:	L70B50 50,000 Hrs
IP Rating:	IP65
IK Rating:	IK10
Working Temperature:	-20°C to 45°C (EM 0°C to 45°C)
Power Factor	>0.9
Emergency Battery Type	LiFePO4
Electrical Class	Class I
Guarantee:	5 Years (Emergency Batteries 3 Year)

Dimensions



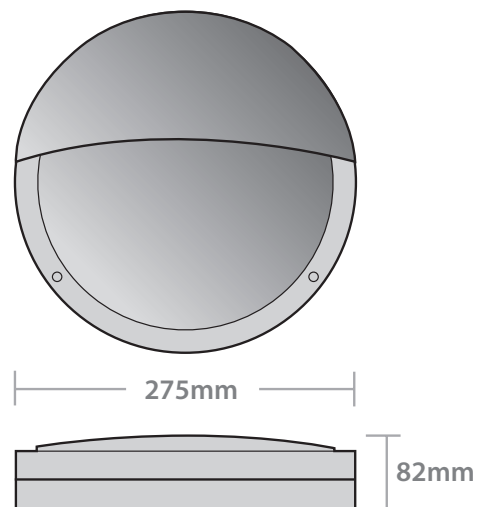


Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Weight (Kg)	Barcodes
DBR18	Die Cast Bulkhead	18W	1400 lm	-	78 lm/W	1.25	5055807615242
DBR18E	Die Cast Bulkhead c/w 3Hr Emergency	18W	1400 lm	220 lm	78 lm/W	1.45	5055807615259
DBR18PC	Die Cast Bulkhead c/w Photocell	18W	1400 lm	-	78 lm/W	1.25	5055807617055
DBR18EPC	Die Cast Bulkhead c/w 3Hr Emergency & Photocell	18W	1400 lm	220 lm	78 lm/W	1.45	5055807617048
DBRE18	Die Cast Bulkhead Eyelid	18W	1400 lm	-	78 lm/W	1.40	5055807615266
DBRE18E	Die Cast Bulkhead Eyelid c/w 3Hr Emergency	18W	1400 lm	220 lm	78 lm/W	1.60	5055807615273
DBRE18PC	Die Cast Bulkhead Eyelid c/w Photocell	18W	1400 lm	-	78 lm/W	1.40	5055807617079
DBRE18EPC	Die Cast Bulkhead Eyelid c/w 3Hr Emergency & Photocell	18W	1400 lm	220 lm	78 lm/W	1.60	5055807617062

Maximum Fittings Per Circuit

Automatic Circuit Breaker Type:	B6	B10	B13	B16	B20	C10	C13	C16	C20
Rated Current:	6A	10A	13A	16A	20A	10A	13A	16A	20A
Cable (mm):	1.5	1.5	1.5	2.5	2.5	1.5	1.5	2.5	2.5
DBR Bulkheads	14	38	63	96	150	62	105	163	250

Light Distribution Curve

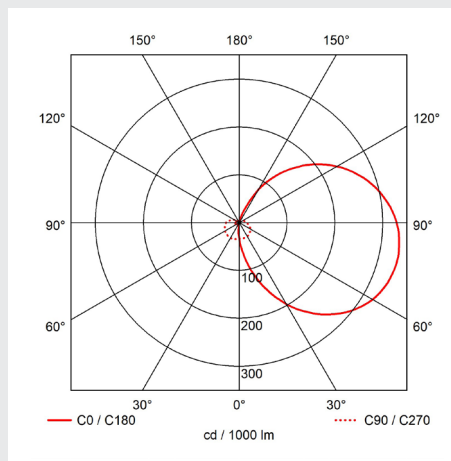

www.redarrowelectrical.co.uk