

Safety Warning



- Read all the instructions prior to use.
- Do not operate if malfunctioned or damaged.
- Keep out of reach of children.
- Do not modify in anyway.




Specification

Box Contents -

Remote control (batteries not included)

Dimensions:	L: 175 x W: 65 x H: 26.75 mm
Material:	Polycarbonate
IP Rating	IP20

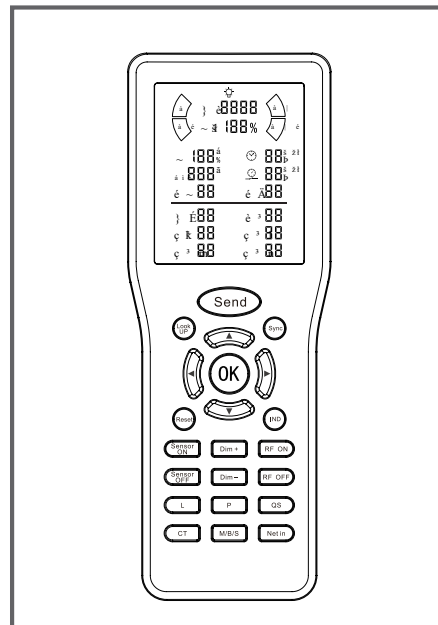

Screen Wake Up:



One-click transmission of all parameters

- Short press to wake the screen up



- Short press to transmit the parameters displayed on the screen. The transmission will take 3-5 seconds, during this period, make sure the remote control is aimed at the sensor. The lamp will flash once if transmit successfully.

Parameters & Configuration:



- Use the arrow buttons to choose.

Icons	Parameter items	Options
D	Detection Sensitivity	100% / 75% / 50% / 25%
LUX	Daylight Sensor	5lux / 15lux / 30lux / 50lux / 100lux / 150lux / 999 (999: daylight sensor disable)
SD	Stand-by Dim Level	15% / 20% / 30% / 50%
	Hold time	5s/30s/1min/3min/5min/10min/20min/30min
	Stand-by Period	0s/10s/1min/3min/5min/10min/30min/99(99: stand-by period +∞)


Enable daylight priority



- Short press and the screen display “P” to enable daylight priority mode, the lamp flashes once after successful setting. The Lamp will be turned on when the lux level is below pre-set turn on value and turned off when lux level exceeds the pre-set turn off value.

Settings	Light ON Below	Light OFF exceeds
5Lux/15Lux/30Lux/50Lux	5Lux/15Lux/30Lux/50Lux	150Lux
100lux	100lux	200Lux
150lux	150lux	300Lux

Quick Setting



- Long press to save parameters displayed on the screen to the QS (Quick Setting) mode. When need to quickly set parameters for a single lamp, briefly press this button to recall the stored parameters, then short press **Send** to quickly configure each parameter, the light will flash once after successful setting.

Turn the screen backlight on/off



- Long press to turn the screen backlight on/off.
- Short press to turn the sensor indicator on/off (If available)

Fig.1


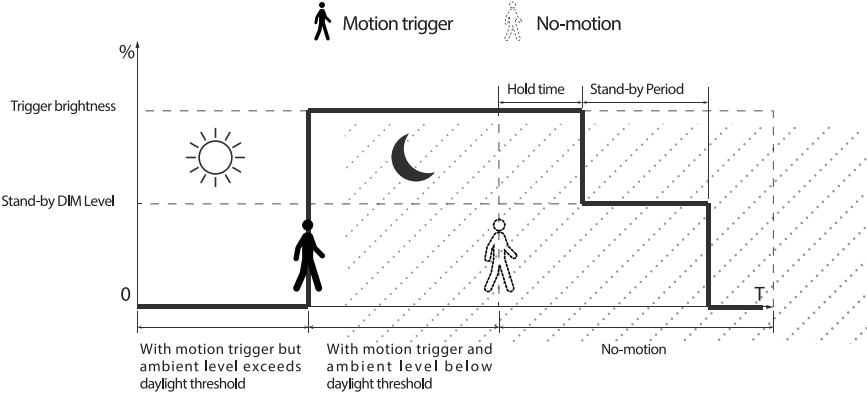


Fig.2

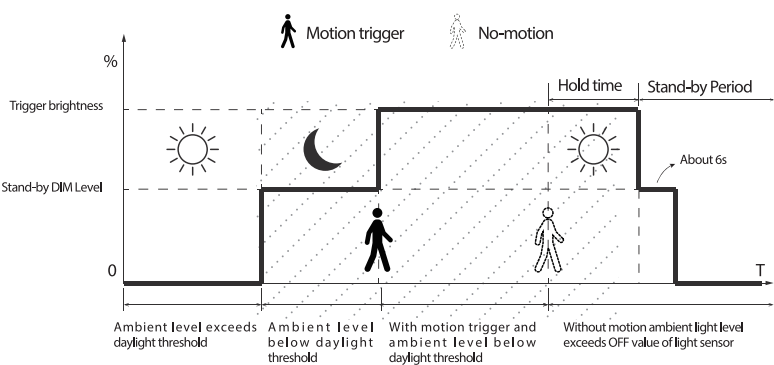

Warranty

This product is covered by a 1-year warranty from the date of purchase. The warranty is invalid in cases of improper use, tampering, removal of the Q.C. date label, operating in an unsuitable environment, or incorrect operation. If this product fails during the warranty period, it will be replaced free of charge, subject to correct operation and return of the faulty unit. We do not accept liability for any third-party costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to the alter specifications without prior notice.