

INSTALLATION INSTRUCTIONS

Versa Work Light

Product Codes: **VER-40-WL**

Safety Warning





- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting.
- If the fitting incorporates control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.



Specification

Box Contents -
1 x Versa Work Light

Dimensions:	VER-40-WL: L: 167 x W: 227 x H: 307 mm
Material:	Body -Aluminium/Plastic
Working Temperature:	0°C to 45°C
Included:	Fully adjustable stand

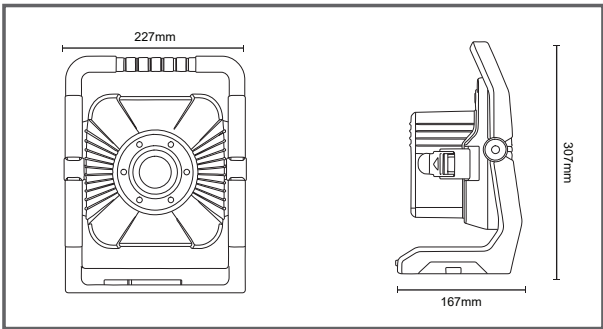

Notes

- Do not place objects within 0.5m of the front of the luminaire.
- Contact your local retailer or wholesaler if the protective screen is cracked or broken.
- Never stare at the LED beam in your Floodlight.
- Do not use the Versa Worklight near oncoming traffic, or in any place where the power of the worklight could cause accidents, except when using SOS function.
- The screen and worklight body may become slightly hot. Do not touch them and never allow contact with flammable materials.
- Do not modify the mechanical or electrical construction of the Floodlight.

Warning


- The battery pack on this Versa worklight is in a low charge state. You must charge the battery pack before using the worklight for the first time
- Do not incinerate the battery pack even if it badly damaged or if it no longer charges. The battery pack can explode when in contact with fire.
- A small leak of fluid from the battery may occur under extreme temperature or use conditions. However, if the outer seal is cracked and the leak contacts your skin, wash the affected area immediately. If the liquid gets in your eyes, rinse your eyes with clean water for at least 10 minutes and seek medical advice immediately.
- Never try to open the battery pack for any reason. If the housing of the battery pack shakes or cracks and opens, stop using it immediately and do not recharge it.
- Do not subject the Versa Worklight to impacts or to violent shocks.
- Do not open the Versa Worklight or modify its components - do not expose it to water, salt water or humidity.
- Do not place the Versa Worklight near fireplaces or in a high temperature environment.
- Do not place the Versa Worklight directly under sunlight or store it inside vehicles in hot weather, otherwise the battery may generate heat, rupture or ignite. Using the device in this way may result in a loss of performance and shorten its life.
- Protect the Versa Worklight against humidity. The device should not be wet or used in a humid environment.
- Always store the Versa Worklight in a dry place.
- If you store the Versa Worklight without using it, store it in a room with an ambient temperature between 15°C and 25°C, charged at 50%. If you store it for a very long time, fully charge the battery once every 6 months to avoid reducing its charging capacity.

Warranty

This product is warranty for a period of 3 years from the date of purchase. The warranty is invalid in the case of improper use, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the I.E.E. Wiring Regulations (BS7671). The warranty is also invalidated if the luminaire has been insulation tested. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

Maintenance

- This fitting will require routine cleaning if used in adverse (dust, paint, weilding, oils etc) environments. Do not use solvents, aggressive detergents or abrasives.
- The light source & driver in this luminaire are not replaceable. When the fitting comes to the end of it's life or you choose to replace it, place do not dispose of it with your normal waste. Please recycle where the facilities exist, check with your local authority for suitable options.

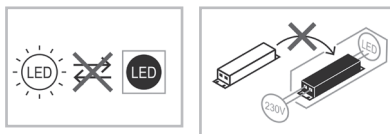

- When this fitting comes to the end of it's life you choose to replace it, please do not dispose of it with your normal waste. Please recycle where the facilities exist, check with your local authority for suitable options.

INS/SITE/0015/KRY/V5