



# CONNECTABLE FESTOON KITS

## 110V EXTENDABLE FESTOONS



Our Connectable Festoon Kit range is now bigger and better, with the addition of 22m and 50m kits in addition to the original 12m kit. All feature our unique connector and can be joined together in any combination up to a maximum length of 200m. This makes extending the festoon on site simple and easy, saving time and money.



### Features


- Extends festoons quickly and easily, up to a maximum combined length of 200m
- Avoids handling heavy, cumbersome festoons - simply link shorter and lighter kits together
- Unique Y-splitter cable for easy configuration, available to order separately
- New, higher light output LED heads
- Starter cable with pre-wired 110V 16A plug



### Specification

<b>Material:</b>	Polycarbonate Heads
<b>Colour Temperature:</b>	6000K
<b>Colour Finish:</b>	Yellow
<b>CRI</b>	Ra>80
<b>LED Lifetime:</b>	L70B50 35,000 Hrs
<b>IP Rating:</b>	IP44
<b>IK Rating:</b>	IK07
<b>Working Temperature:</b>	-20°C to 40°C
<b>Power Factor</b>	>0.9
<b>Electrical Class:</b>	Class I
<b>Guarantee:</b>	2 Years

### Dimensions

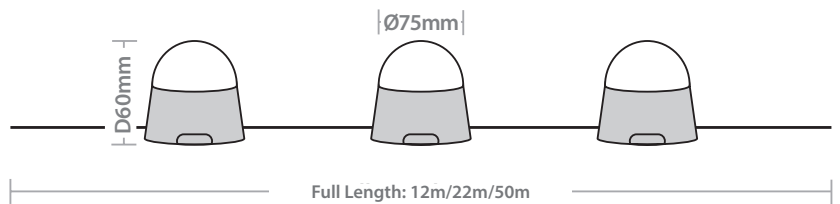

Product Code	No of Heads	Overall Length	Head Centres
FKF1230YPW	6	12m	2m
FKF2250W	10	22m	2.2m
FKF50100W	20	50m	2.5m

Product Code	Description	Wattage	Lumen Output	Efficacy	Net Weight	Barcodes
FKF1230YPW	110V Connectable Festoon Kit 6 Way 12m	30W	3300 lm	110 lm/W	1.2	5055807620420
FKF2250W	110V Connectable Festoon Kit 10 Way 22m	50W	5500 lm	110 lm/W	2.4	5055807624350
FKF50100W	110V Connectable Festoon Kit 20 Way 50m	100W	11000 lm	110 lm/W	4.6	5055807624367
FKS30YPW	60cm Y-Splitter Cable	-	-	-	0.12	5055807620437



FKF2250W



FKF50100W



**UNIQUE PLUG & PLAY CONNECTABLE FEATURE - EXTEND YOUR FESTOON UP TO 200M IN LENGTH QUICKLY AND EASILY**

1.




Connect the starter cable to the first kit, pre-wired with a 110V 16A plug ready to connect into your transformer.

2.



Extend your festoon by connecting multiple kits, up to 200m total length max.



3.

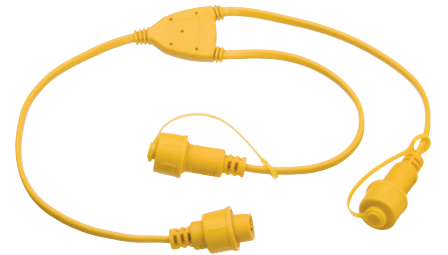

FKS30YPW

Use the Splitter Cable (sold separately) to branch off in different directions.

**Light Distribution Curve**

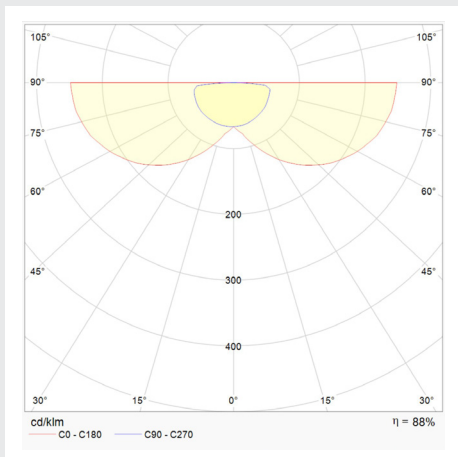

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)

**ENERGY**

**Red Arrow**  
FKF

A  
B  
C  
D  
E  
F  
G

**E**

**30-100**  
kWh/1000h

2021 No. 1095