

INSTALLATIONS INSTRUCTIONS

STELLAR UGR ACCESSORIES

SR/UGR/PIK


Safety Warning



- The installation should be carried out by a qualified electrician in compliance with the current edition of the IEE Wiring Regulations.
- Prior to installation, carry out the necessary risk assessment considering the people who could be at risk, the level of risk and the precautions required to control the risk
- Ensure that the circuit supply is isolated either by the circuit supply fuse being removed or the applicable circuit breaker being turned off before installation or any maintenance.
- Check the total load on the circuit ensuring the luminaire does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Long-term use and voltage fluctuations can reduce the life span of the fitting
- If the fitting incorporates, control gear, ensure careful sizing to avoid instances of nuisance tripping of the protective device used in the installation.
- Follow the provided installation instructions, using the fixings supplied or recommended.
- Keep out of reach of children.




A ISOLATE MAINS SUPPLY BEFORE COMMENCING INSTALLATION!

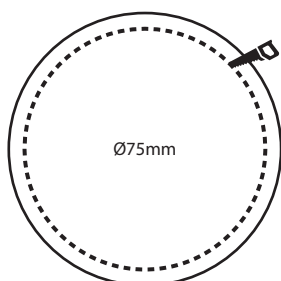

- Cut out a 75mm circular hole at the desired location using a holesaw.


B

- Fit the plaster-in collar into the hole.
- Use a hand to hold the mesh whilst fixing the collar in place with drywall screws. All six screws must be used to avoid risk of the plaster cracking.

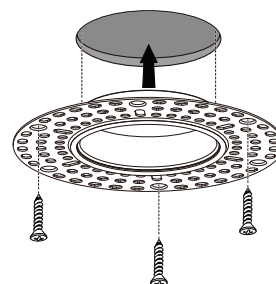


TAKE CARE TO AVOID FINGERS WHEN FIXING THE SCREWS

C

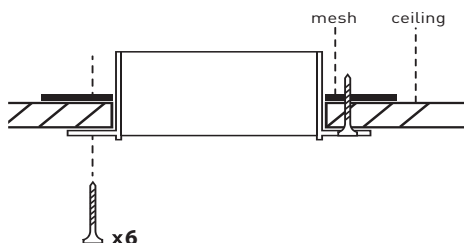


- Use a hand to hold the mesh down whilst fixing the collar in place with drywall screws. All six screws must be used to avoid risk of the plaster cracking.
- **TAKE CARE TO AVOID FINGERS WHEN FIXING THE SCREWS**

D

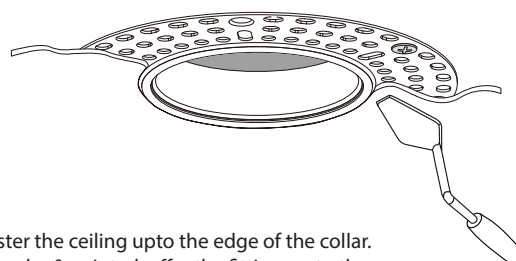


- Plaster the ceiling upto the edge of the collar. Once dry & painted, offer the fitting up to the collar.

E

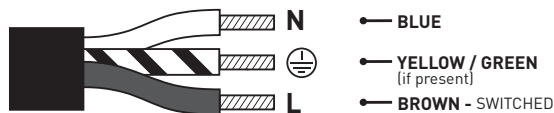

- Connect luminaire to mains supply using a terminal block.

F

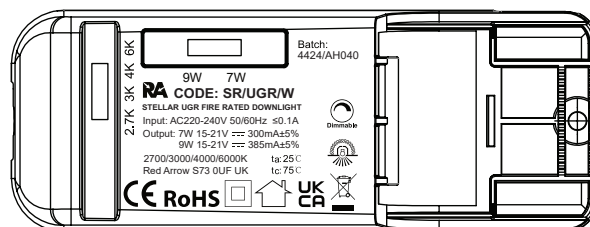




- Select desired wattage and CCT.

PRODUCT_V1

INSTALLATIONS INSTRUCTIONS

STELLAR UGR ACCESSORIES

SR/UGR/PIK

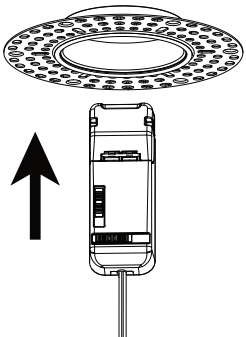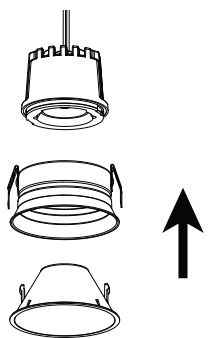G  - Install driver into ceiling void	H  - Plug connectors together ensuring they are tight.
I  - Remove recessing kit from LED head - Attach LED head top plaster in kit. - Chose desired coloured reflector and clip in to plaster in kit. - Turn power on and test prior to fully installing in the ceiling. - Push fully assembled plaster in kit in to the holder.	

Warranty

This product is covered by a 1-year warranty from the date of purchase. The warranty is invalid in cases of improper use, tampering, removal of the Q.C. date label, operating in an unsuitable environment, or incorrect operation. The warranty is also void if the luminaire has been insulation-tested. If this product fails during the warranty period, it will be replaced free of charge, subject to correct operation and return of the faulty unit. We do not accept liability for any third-party costs associated with the replacement of this product. Your statutory rights are not affected. We reserve the right to alter specifications without prior notice.

PRODUCT_V1